

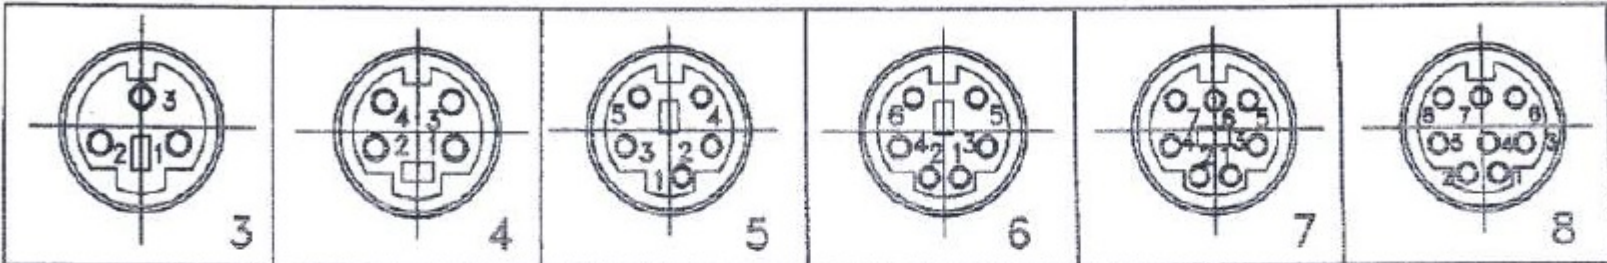


DIMENSIONS ARE IN MILLIMETERS

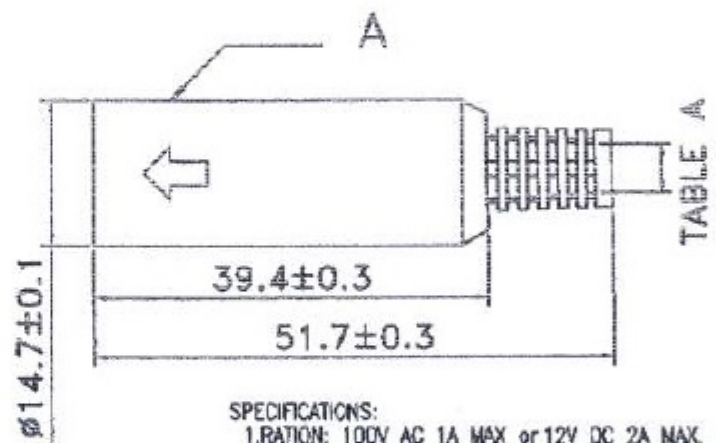

0.5-5 = ± 0.2
 5-30 = ± 0.4
 30-120 = ± 0.5
 120-315 = ± 1
 315-1000 = ± 1.5
 1000-2000 = ± 2.4

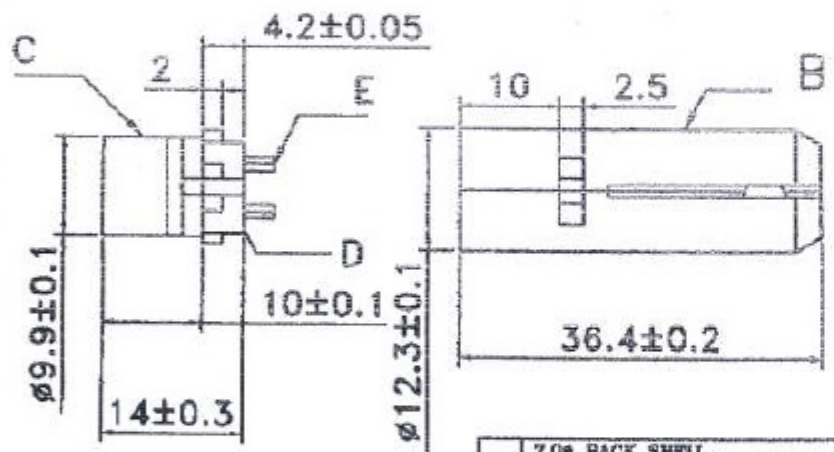

MATERIALS:

- A. BOOT: PE + 2L
- B. MIDDLE HOOD: ABS
- C. METAL SHELL:
COPPER NICKEL PLATED
- D. INSULATOR: NYLON 66 + GLASS
- E. PIN CONTACT:
BRASS SILVER PLATED

<input type="checkbox"/>	7.0# BACK SHELL
<input type="checkbox"/>	8.0# BACK SHELL
<input checked="" type="checkbox"/>	6.0# BACK SHELL (STANDARD)
<input type="checkbox"/>	COVER DIM.

TABLE A

SPECIFICATIONS:

1. RATION: 100V AC 1A MAX or 12V DC 2A MAX.
2. INSULATION RESISTANCE: 50M OHM MIN at 250V DC.
3. DIELECTRIC STRENGTH: 250 V AC / 1 MINUTE.
4. CONTACT RESISTANCE: 30M OHM MAX.
5. INSERTION FORCE: 4.5KG MAX.
6. WITHDRAWAL FORCE: 0.9KG ~ 3KG.
7. OPERATING TEMPERATURE: -20°C ~ 105°C

APPROVED BY:



Date: JAN 06 2007

Description: MINI DIN JACK FOR CABLE ASSEMBLY

Part No.: DI-6730

File No.: 63000

